

Cell Switch Prime

T-Mobile SIM Card
Included at No Charge
For easy activation.

RANGE

Access Control

CELLULAR ACCESS CONTROL RELAY


Cell Switch Prime



Open gates with
an APP.



- Open gates or door from a phone using caller ID number recognition.
- Stores up to 100 authorized numbers.
- Easy to program by SMS text.
- Free Iphone and android apps for easy control of gates.
- 1 status input for checking gate status.
- Activity log to check which phone users called your gate and when with time and date log.
- 7 day time clock feature built in, for automatic opening and closing at pre-set times and days of the week (up to 40 events).
- 3 year limited warranty.

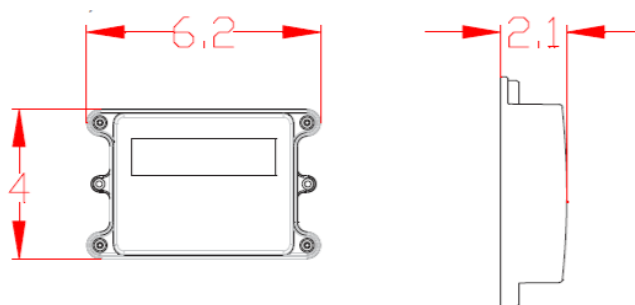

General

Voltage: 12v dc – 24v ac.

Solar operable: Yes.

Current on standby: 55mA.

Operating Current: 300mA.

Peak Demand Current: 2 amps.

Cellular module

Relays: 2 relays, max 2 amps, 24v ac/dc load.

Latching: Yes.

Caller ID users: 100.

Programming: SMS.

Network compatibility: AT&T, T-Mobile.



BFT Americas, Inc.
6100 Broken Sound Parkway N.W.
Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155

➔ info.bft@bft-usa.com

➔ www.bftaccess.com

➔ www.bftautomation.com