




Low voltage hydraulic operator for very intensive use, suitable for any type of residential, industrial or multi-residence application.

Compact and sturdy, they can automate swing gate leaves up to 2.5m wide and weighing up to 800kg. Fitted with mechanical stops and virtual encoder, guaranteeing maximum anti-crushing safety thanks to the electronic slowdown and D-Track system

DIMENSION (MM)

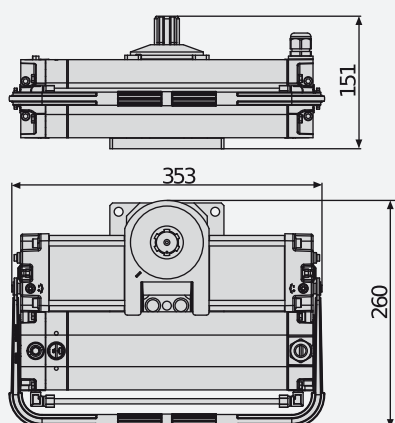

Technical features

	SUB BT
Control unit	
Motor voltage	24 V
Power input	300 W
Max. width of door/gate wing	2.5 m
Max. weight of door/gate wing	800 kg
Maximum angle	120 °
Cycle time	13 s
Slowdown	Yes
Locking	Open/close hydraulics
Release	Lever or lever with personalised key
Impact reaction	D-Track
Frequency of use	very intensive
Protection rating	IP67
Environmental conditions	-20 ÷ 60 °C



		Description	
P930123 00001	SUB BT	Low voltage, in-ground irreversible hydraulic operator for hinged leaves up to 2.5 m. weight 800 kg. D-Track.	 U-Link

THALIA P: Control panel for one or two 24V electromechanical and hydraulic operators for swing gates with electric lock management, for highly complex systems.


D113747 00002 - THALIA P - Built-In



- Control panel for one or two 24V electromechanical and hydraulic operators for swing gates with electric lock management, for highly complex systems
- Application: control panel with display for one or two 24V electromechanical and hydraulic operators for swing gates with electric lock management, for very-complex installations
- Board power supply: 230V single-phase
- Operators power supply: 24Vdc 240W max each operator
- Main features: removable terminal blocks with new standard colour-coding, simplified scenario-based programming with display and incorporated dual channel receiver, D-Track anti-crushing system, slowdown during opening and closing and electronic self-learning
- Main features: automatic closing, rapid closing, partial opening, operation with deadman feature, direct connection powered solenoid lock and electromagnet, direct connection edge BK2
- Compatibility: LIBRA C MA, LIBRA C LX, LIBRA, LIBRA R, LIBRA MA R

RECOMMENDED ACCESSORIES

	N733480 00001 - FCS BT		N733392 - SCC
	Foundation box for SUB BT series operators.		Release for ELI 250N and SUB BT with lever key.
	N733502 - SCP		P125020 - BBT BAT
	Release for ELI 250 and SUB BT with personalized key.		Set of backup batteries for THALIA and THALIA P.

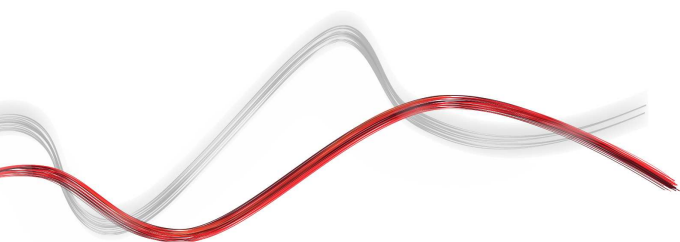

www.bft-automation.com

INFORMATIVA A TUTELA DEI DIRITTI DI PROPRIETÀ INDUSTRIALE E INTELLETTUALE DI BFT. BFT S.p.A. tutela i propri diritti di proprietà industriale attraverso il deposito di marchi, brevetti, modelli e design. La proprietà intellettuale di BFT S.p.A. è tutelata a norma della legge sul diritto d'autore. BFT S.p.A. tutela inoltre il proprio know-how adottando misure di protezione delle informazioni tecniche e commerciali inerenti la propria azienda e i propri prodotti. Tutti i prodotti presenti in questo catalogo sono MODELLI ORIGINALI BFT e BFT S.p.A. è la sola autorizzata a produrli e commercializzarli in tutto il Mondo. Tutti i nomi commerciali attribuiti ai prodotti presenti in questo catalogo sono di titolarità di BFT S.p.A. che è la sola autorizzata al loro uso in relazione alla relativa categoria merceologica. I CONTRAFFATTORI VERRANNO PERSEGUITI A NORMA DI LEGGE SIA IN SEDE CIVILE CHE PENALE. IL TUTTO A GARANZIA NON SOLO DEL PATRIMONIO INTELLETTUALE DI BFT, MA ANCHE A TUTELA DEI CLIENTI CHE ACQUISTANDO PRODOTTI BFT ACQUISTANO PRODOTTI ORIGINALI FRUTTO DI STUDI E PROGETTI INTERNI ALLA SOCIETÀ BFT.